



**CITY OF SNYDER
PLANNING & ZONING
FOOTER AND SLAB CONSTRUCTION**


FOOTER REQUIREMENTS

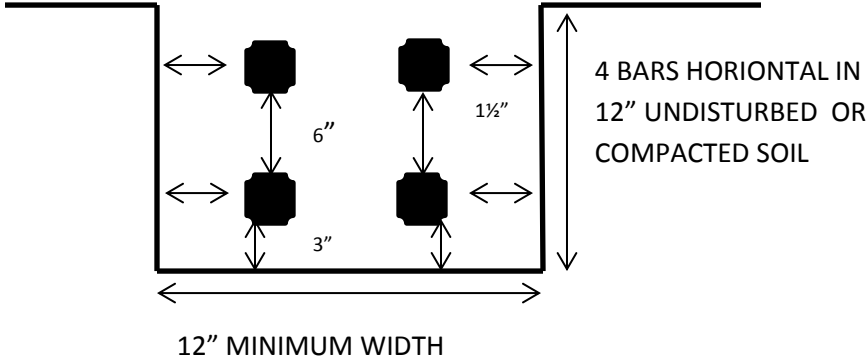

MINIMUM 15 BAR WIDTH AT OVERLAP

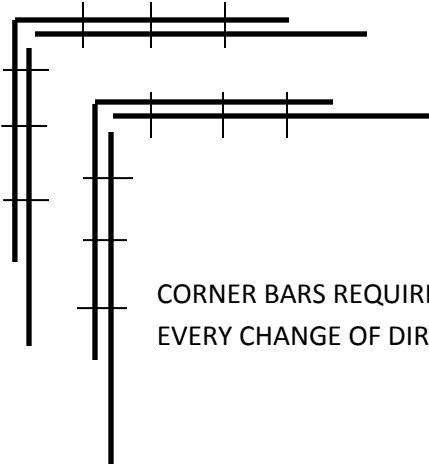

CORNER BARS REQUIRED AT
EVERY CHANGE OF DIRECTION



SLAB REQUIREMENTS

- MINIMUM 3/8" STANDARD REBAR (OR MATCHES PLAN SIZE).
- MINIMUM 18" GRID
- MINIMUM 3 ½" SLAB DEPTH
- REBAR TIED AT INTERSECTIONS

